



Escorts Kubota Limited

Construction Equipment

**LIFT WITH POWER
MOVE WITH PRECISION**

F17



Creep Speed
1.3 km/h
Performance &
Safety



Capacity
17 t
High
Performance



Service Interval
(Engine) 500 hrs
Low
Maintenance



Boom Height
21 m (with Fly Jib)
High
Performance



Shortest Turning
Radius 7.2 m
High
Performance



Max Speed
49 km/h
High
Performance

**CEV
STAGE V**

About Us

Experience. Engineering. Excellence.

Escorts Kubota Limited is committed to building a lasting legacy through a transformative mission of global excellence. We lead in farm mechanization, smart agriculture, advanced construction equipment solution. Dedicated to a brighter future for our customers, nation, and the world, we focus on continuous innovation and value creation.

Our Belief

At Escorts Kubota Limited our journey is deeply connected to the aspirations of our stakeholders, focusing on building a sustainable ecosystem founded on transparency, trust, and respect. We deliver exceptional product quality and innovation for customers, nurture employee growth, and contribute positively to the communities we serve.

Our Journey

1944



Escorts was founded

1971



Escorts pioneered the first HYDRA crane in India

1985



Rough Terrain - RT30 & RT40 were introduced

1999



Pioneered High-End crane model K10 was introduced

2002



High-End crane model F15 was introduced, which become our flagship model

2009



Design & developed M1000 crane Loader

2014



Launched F15 2WD affordable High-End crane

2015-16



Launched High-End crane F20

2018



Launched new models - Hydra 13/15, TRX15/2319, High-End F17 & NXT13

2025



Launched the entire CEV Stage V range & resetting industry with all new Hydra 12

Explore Our Range



HYDRA CRANES	HIGH END CRANES	MINI EXCAVATORS	BACKHOE LOADERS	TANDEM COMPACTORS	SOIL COMPACTORS	ROUGH TERRAIN CRANES
12 t - 15 t	14 t - 30 t	1.8 t - 4.9 t	7.8 t	3.3 t - 9.4 t	10 t - 12 t	20 t - 40 t
9.6 m (27 ft) - 19 m (65 ft)	18.2 m (60 ft) - 20.1 m (66 ft)	12 kW (16.1 HP) - 28.8 kW (38.6 HP)	54.5 kW (74 HP)	33.5 kW (45 HP) - 54.5 kW (74 HP)	82 kW (110 HP)	23 m (75 ft) - 36 m (118 ft)

F17

A 17 ton High-End Crane with 4 section 18.2 m boom height. Key components come from reliable brands. Operator comfort with safety is provided by new cabin design with better visibility.

 Superior Lifting Capacity 17 t

 Operator's Cabin
Ergonomically Designed Cabin with Safety & Comfort

 VECV Engine, Transmission & Axles





Unmatched Durability & Strength

Built with a rugged chassis and high-strength materials, ensuring longevity and reliability in demanding work environments.



Enhanced Visibility for Maximum Control

Thoughtfully designed operator cabin with a wide field of vision for precision handling and improved safety.



Power-Packed Performance

Powerful and reliable fuel efficient VECV Engine, transmission & axles with low maintenance benefits.



Ultimate Safety & Stability

Equipped with reinforced structure and fail safe braking system with additional operating weight for secure operation



Superior Operator Comfort


Spacious and ergonomically designed operator cabin with easy controls for fatigue-free operation.



No. 1 Choice in High-End Crane

Proven track record of reliability and efficiency, making it the top choice for material handling and construction applications.

Unmatched Performance

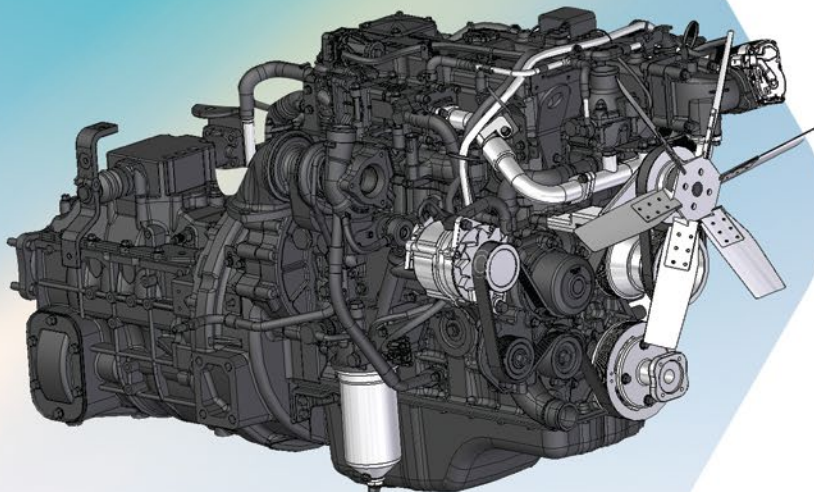

74 kW (101 HP) Volvo Eicher CEV Stage V Engine

VECV E494, CEV Stage V, diesel engine, high pressure common rail (HPCR) system technology, turbo charged, water cooled, ECU for engine management system, developing 74 kW/ 101 HP @2 200 RPM



DOC+DPF+SCR



Service interval



HPCR System

High Pressure Common Rail (HPCR) System provides cleaner exhaust, delivers more horsepower and fuel efficiency per displacement



10F + 2R Speed Synchromesh Transmission

Engine is coupled with VECV Synchromesh transmission gear box and auxiliary gear box with high/low & 2WD/4WD mode selector.



Heavy Duty VECV Front & Rear Axle

Heavy-duty rigidly mounted VECV drive axle for heavy load application




Electronic Management System

Electronic Control Unit (ECU) for Engine diagnosis & troubleshooting




High Performance Clutch

Cerametallic clutch for smooth power transmission, better service life and low maintenance cost.



Shortest Turning Radius of 7.2 m

Better maneuverability in tight space and difficult working sites



Faster Travel Steady Loading

- 49 km/h Top Speed, fastest in the Industry Approved by ARAI
- 1.3 km/h Creep speed, Better control of load while working



6 Falls with Auto Leveling Hook Block

Provide precision handling & auto leveling of hook block during boom extension and retraction

Load chart


RADIUS (M)	A					
	BOOM LENGTH(L) IN METERS MANUAL EXTENSION RETRACTED					MANUAL EXT. EXTENDED
	5.93	8	10	11	13.85	17.75
2	8250	8250	8250			
3	8250	8250	7590	5720		
4	6325	6270	5577	4950	4365	
5		4850	5200	4400	3800	1850
6		3950	3850	3800	3400	1700
7			3150	3150	3000	1600
8			2650	2725	2640	1540
9				2340	2280	1450
10					1950	1375
11					1706	1290
12					1485	1245
13						1220
16						990
18						

B			
BOOM PIVOT TO INNER LUG IST JIB EXTN. MANUAL EXTN. RETRACTED			
3.85	5	6	7.81
13200	12100	12100	11600
	7700	7700	7370
		5280	5225
			3925


C	
17 T LUG	
BOOM FULLY RETRACTED	
RADIUS (M)	S.W.L (KG)
1.5	17000

D FLY JIB (BOOM FULLY EXTENDED)
820
820
770
770
660
710
660
550

- RADIUS IS THE HORIZONTAL DISTANCE MEASURED FROM THE CENTRE OF FRONT WHEEL TO THE LOAD POINT
- S.W.L ARE BASED ON 85% STABILITY & STRENGTH
- S.W.L ARE BASED ON FIRM LEVEL GROUND WITH TYRES 11X20X16 PLY INFLATED TO 115 PSI, WEIGHT OF HOOKS, BLOCKS, SLINGS & CHAIN ETC. INCLUDED.
- LIFT & CARRY - THE S.W.L. SHALL BE CARRIED WITH THE MINIMUM BOOM LENGTH & AS CLOSE TO THE GROUND AS POSSIBLE AT SPEEDS NOT IN EXCESS OF 2 KMPH
- BOOM HEAD MOUNTED RHINO HOOK CAPACITY- 6 000 kg
- RATED LOADS ARE CALCULATED FOR OPERATION ON LEVELED SURFACE.

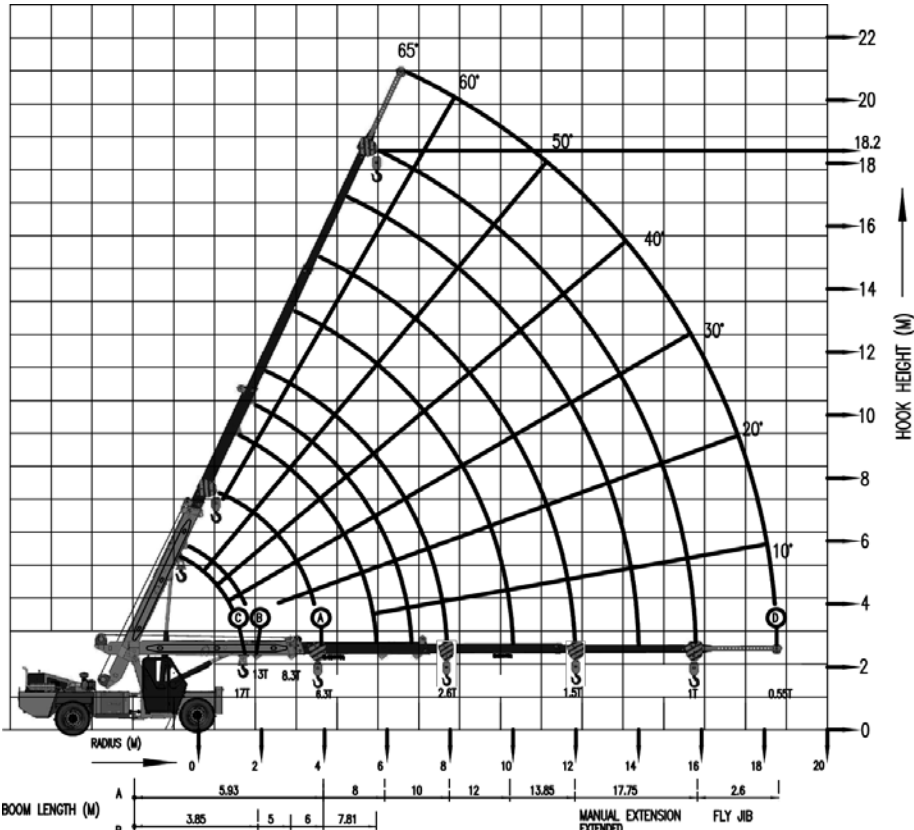

F17 - Dimensions (Ref.) & Area of Operation

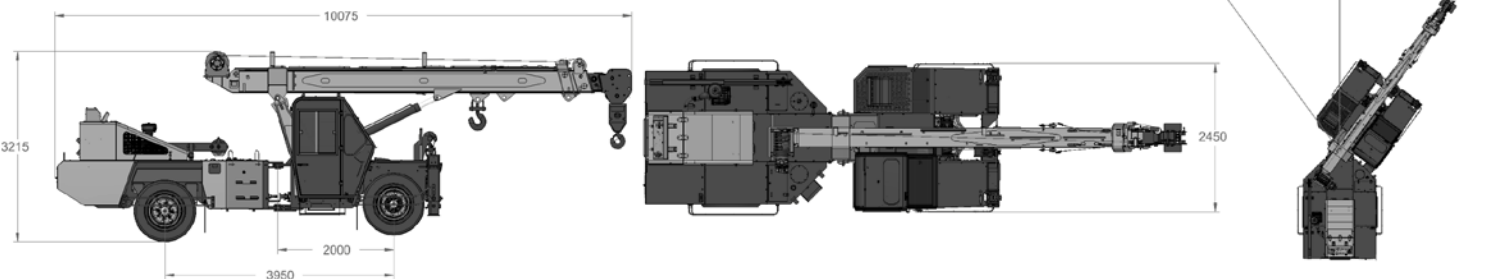

NOTE:- Technical modification reserved. All dimensions, Speeds & weights are variable within ± 5% over indicated values.

Unmatched Comfort



Rocker Switches
Reliable and low effort Rocker Switch with better aesthetic appearance.




Digital Display
Bright and easy-to-read, Single digital cluster with all gauges, fault code detection for engine system. Regeneration text pop-up flashed on display for operator convenience & actions



17.8 cm (7 inch) TFT Display for Rear Camera
Allows operator an unobstructed view to ensure safety of machine & surroundings



All new weatherproof cabin with better visibility, comfortable operator seat with safety seatbelt, and EMI & EMC compliant electronics for reliable performance.

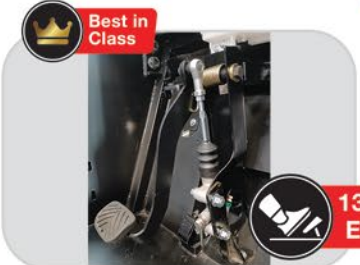

Hydro Pneumatic Clutch
51% reduction in operating effort to significantly reduce operator fatigue



Diesel Particulate Filter (DPF) Switch
Regeneration Switch on the dashboard



Wider Operator Seat
Comfortable operator seat with safety seat belt



Electronic Accelerator Pedal
Low effort electronic accelerator pedal reduce operator fatigue

Unmatched Safety



Best in Class

LED Work Lamps
Better night visibility for uninterrupted operation



Best in Class

12V, 150Ah Battery
Adequate battery capacity for superior cranking response & powering variety of accessories



Higher Stability
Longer wheelbase of 3 950 mm for more stability and load handling



Best in Class

Safe Load Indicator (SLI)*
Continuously monitoring of appropriate load to ensure crane safety from overloading



Best in Class

Projector Head Lamps
For superior night visibility



Tyres 11 x 20 - 16 PR
Industrial grade same size tire helps interchangeability with each other with wheel guard



5 t Load Pull*
Drag winch for horizontal pulling or dragging of load



Front Outrigger
Heavy duty front outrigger for superior stability during erection

Optional Safety Accessories

- Outrigger Home Position Sensing System (OHPSS)**
Whenever outrigger leaves its home position then blow audio alert and indicator arises
- Use of 1st & Reverse Gear For Craning Operation**
Speed ≤2 km/h Audio Alarm will blow
- Mandatory Outrigger Mechanism For Erection Jobs**
Whenever boom open for higher height operation, an alarm will blow for opening outrigger for safe operation
- Restriction of Forward Movement in Engaged Outrigger Condition**
When outrigger is in open condition audio alert will blow
- Safe Mode Operation (No Bypassing Allowed)**
Safe mode operation while overloading/unsafe condition by restricting lifting load, opening boom and lift down operation
- Lateral & Longitudinal Angle System (Unsafe Stability)**
When machine is working in undulation ground / unsafe stability, alarm start blowing
- Anti-Toppling System**
Whenever rear axle leaves ground in case of undulation/off road craning operation, buzzer will beep and brake will applied
- Human Proximity Sensor**
Whenever human or any obstructions come near machine, sensors will get activated mounted on front, LH & RH side
- Integration of SLI With Telematics**
SLI data available on telematic server and mobile application

SPECIFICATIONS

Rated Capacity	
17 t	1.5 m radius
1 t	15.80 m radius
Max Height	21 m (with Fly Jib)
SWL based on 75% to 85% Stability & Strength (IS 4573)	
Vehicle Performance	
Max Speed	49 km/h
Creep Speed	1.3 km/h
Gradeability	40% to 38% unladen
Drive	
4 Wheel Drive	
Engine	
VECV E494, CEV Stage V, diesel engine, high pressure common rail system (HPCR) technology, turbo charged, water cooled, ECU for engine management system, developing 74 kW/ 101 HP @2 200 RPM	
Transmission & Clutch	
Engine is coupled with synchromesh transmission gear box and auxiliary gear box with high/low & 2WD/4WD mode selector	
Clutch	Single, dry type friction clutch plate (self adjusting)
Clutch Actuation	Pneumatically assisted hydraulic clutch
Speeds	10 forward & 2 reverse with AGB
Axles	
Front	Rigidly mounted
Rear	Mounted with two semi-elliptical springs
Tyres	
8 no's.-11 x 20-16PR	
Hydraulic System	
Main Pump	Vane type Pump
Control Valve	Main control valve 3 spool double acting with a built-in relief & auxiliary valves
Outrigger Control Valve	2 spool double acting
Dragging Winch Control Valve	Single spool double acting valve
Steering	
Full power orbitrol with twin hydraulic double acting rams 36.3° articulation on either side	
Brakes	
Service	Fully air operated brakes 'S' cam dual circuit brakes on front and rear wheels
Parking	Air operated, spring actuated, fail safe brakes on front & rear wheels
Electrical System	
12 V, Negative Earth, 150 Ah Battery	Fuel Tank - 220 l
Ignition key to switch ON/OFF engine	Hydraulic Tank - 228 l
Boom	
4 parts boom, 3 parts hydraulically powered & fully synchronized, 4th part power extended & manually pinned for safety	
Luffing range: - 10° to + 65°	
Dimensions	
Wheelbase	3.95 m
Overall Length	10.08 m
Overall Width	2.45 m
Overall Height	3.22 m

Wheel Track	
Front	1.83 m
Rear	1.83 m
Turning Radius	
7.2 m	
Hoist	
Hydraulically operated with 6 falls, Built in safety brakes	
Operating Weight	
Front Axle	7 425 kg
Rear Axle	10 155 kg
Total	17 580 kg
Standard Safety System	
• Safety Brakes on Hoist • Counter Balance Protection Valve in the Lift Circuit against Hose Burst • Visual Warning for Parking Brakes ON • Low Air Pressure Warning Buzzer	
• Regeneration text pop-up messages in Instrument Cluster	
Standard Accessories	Optional Accessories
• All Weather Cabin with Unrestricted Visibility • Rear View Camera with LCD • Front Outriggers • Wheel Guards • Mobile Charging Socket • Battery Cut-off Switch • Auto Leveling Hook Block • Projector Head Lamp • LED Work Lamp • LED Cabin Lamp • Fly jib	• Safe Load Indicator with Hydraulic Cut-off • Man Carrying Basket • Fire Extinguisher • Helper Seat Platform • Drag Winch • Rhino Hook • Stereo System • Equipment Monitoring System (Telematics)

SERVICE & SPARES SUPPORT

- WARRANTY AND POST WARRANTY SERVICE
- ON-SITE SERVICE THROUGH A WIDE NETWORK OF DEALERSHIPS.
- FIELD DIAGNOSTIC VEHICLE FOR IMMEDIATE ON-SITE RESOLUTION.
- COMPLETE RANGE OF GENUINE SPARE PARTS & LUBRICANTS.



80+ DEALERS



200+ SERVICE & TOUCHPOINTS



Toll Free No.:
1800-180-4488

(Timings: 9:00 am - 5:30 pm, Monday to Saturday)

Escorts Kubota Limited - Construction Equipment
Plot no. 219, Sector-58, Ballabhgarh-121004, Faridabad, Haryana (INDIA)
Website: www.escortskubota.com | WhatsApp: +91 7303844233
Email: ekl_g.ece.marketing@escortskubota.com




Download Brochure



Scan now & follow us



Download Customer App for more details



Authorised Dealer

• The information contained in this leaflet is intended to be of a general • We reserve the right to changed specification with notice. • All Dimensions and weights are variable within +/-5%

Accessories as shown in the picture may not be part of standard fitment and are subjected to change without prior notice