

DESIGNED BY BUILT FOR





Top Jack High Performance



1.7 km/h
Performance &
Safety



Hi-Visibility Cabin High Performance



Service Interval (Engine) 500 hrs Low Maintenance



Heavy Duty Straight Axle High Performance



Max Speed 29 km/h High Performance



About Us

Experience. Engineering. Excellence.

Escorts Kubota Limited is committed to building a lasting legacy through a transformative mission of global excellence. We lead in farm mechanization, smart agriculture, advanced construction equipment solution. Dedicated to a brighter future for our customers, nation, and the world, we focus on continuous innovation and value creation.

Our Belief

At Escorts Kubota Limited our journey is deeply connected to the aspirations of our stakeholders, focusing on building a sustainable ecosystem founded on transparency, trust, and respect. We deliver exceptional product quality and innovation for customers, nurture employee growth, and contribute positively to the communities we serve.

Our Journey







Rough Terrain - RT30 &


RT40 were introduced














2009

Escorts was

founded



Design & developed M1000 crane Loader



Escorts pioneered the first

HYDRA crane in India

Launched F15 2WD affordable High-End crane



crane F20

Launched new models -Hydra 13/15, TRX15/2319, High-End F17 & NXT13

Launched the entire CEV Stage V range & resetting industry with all new Hydra 12

2025

Explore Our Range









HYDRA CRANES	HIGH END CRANES	MINI EXCAVATORS	BACKHOE LOADERS	TANDEM COMPACTORS	SOIL COMPACTORS	ROUGH TERRAIN CRANES
12 t -15 t	14 t -30 t	1.8 t - 4.9 t	7.8 t	3.3 t - 9.4 t	10 t - 12 t	20 t - 40 t
9.6 m (27 ft) - 19 m (65 ft)	18.2 m (60 ft) - 20.1 m (66 ft)	12 kW (16.1 HP) - 28.8 kW (38.6 HP)	54.5 kW (74 HP)	33.5 kW (45 HP) - 54.5 kW (74 HP)	82 kW (110 HP)	23 m (75 ft) - 36 m (118 ft)

HYDRA 15

The Brand New CEV Stage V Hydra 15 Top Jack is a robust and reliable crane designed to handle a variety of material handling tasks in construction and industrial environment.





Built with a rugged chassis and high-strength materials, ensuring longevity and reliability in demanding work environments.



Equipped with a reinforced structure, Seat belts and fail-safe braking system for secure operations.



Thoughtfully designed operator cabin with a wide field of vision for precise load handling and improved safety.



Spacious and ergonomically designed operator cabin with easy controls for fatigue-free operation




High-torque engine and advanced hydraulics deliver superior lifting and loading efficiency.




Engineered for optimal fuel efficiency, reducing operational costs without compromising performance.

Unmatched Performance & Durability

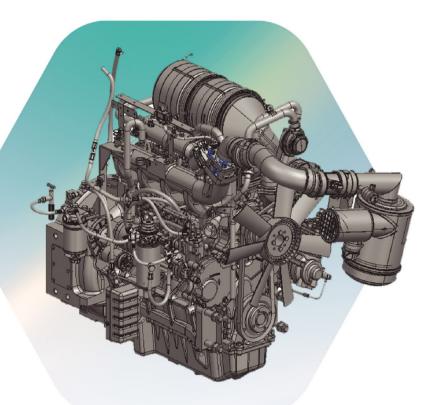



Less Noise, Better Performance



Top Notch Constant Mesh Gearbox: 8F+2R Designed to deliver excellent performance in craning with high low selector for effortless gear engagement, minimizing noise & maintenance



Faster Travel, Steady Loading

- 29 km/h top speed, fastest in the Industry, approved by ARAI
- 1.7 km/h creep speed, better control of load while working



6 Falls with 12 t Hoist Winch Allows lifting heavier loads.

Reliable Escorts Kubota **CEV Stage V Engine**

Equipped with DOC and DPF, Escorts Kubota E4.391NA CEV Stage V compliant 37 kW (50 HP) direct-injection engine









Higher Engine Torque: 217 Nm

Torque increased 14.2 % from 190 Nm to 217 Nm with better performance and fuel efficiency in working condition



Higher Stability

Lower articulation angle upto 48° either side, ensure higher stability while lifting load



Higher Operating Weight (12.05 t)

Handle load with confidence




High Performance Clutch

Cerametallic Clutch for smooth power transmission, better service life and low maintenance cost



Top Jack

Provides powerful and controlled lift for heavy loads, quick and low maintenance

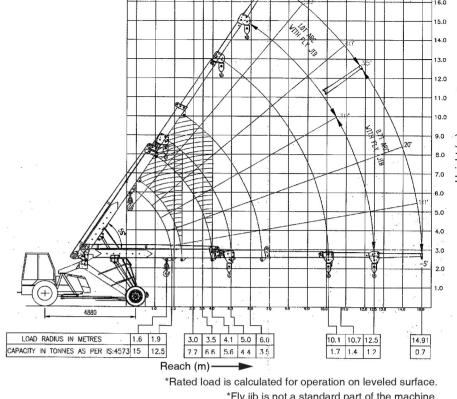

*Fly jib is not a standard part of the machine.



LOAD CHART

HYDRA 15 TOP JACK

-5° Luffing Angle

Max Boom Height 17.2 m *with Fly Jib

across industry

Support variety of application

Helps in handling load in confined areas, specially in low lying spots, minimizing use of slings

Shorter Front Track Width of 1.98 m

Better performance in tight spaces and difficult working spaces



Peak Safety



High-Visibility Cabin

Full glass cabin for superior tyre visibility & working safety



Hoist Winch (12 t) with Built in Safety Brakes

Branded hoist winch for superior reliability & safety



Counter Balance Protection Valve

Prevent boom from sudden lowering in case of hose leakage in the lift line



Overload Audio Warning System

Prevent overloading of crane and ensures safety of operator and surrounding



All Wheel Pneumatic Brakes

Superior braking response with lower maintenance cost



Other Safety Features

- Weatherproof IP67 Electrical Connectors
- Low Air Pressure Warning Buzzer

Round Lever Knobs

Easy to reach with increased

hand grip and minimal effort to

- Neutral Starting Switch
- Grab Handle for Helper



Peak

(Engine)

Reliability

500 hrs service Interval

Reduces Downtime and

maintenance costs, keeping

equipment working longer

between services

Rear Tyres Mudguard

Clean cabin for the operator, Improves productivity and requires less maintenance



Longer Steering Cylinder with Guards

Longer steering cylinder having bigger rod diameter for enhanced side stability and maneuverability. Cylinder protection guard as standard reduces maintenance



Boltable Luff Bracket

Increased cylinder distance and boltable luff bracket to handle boom jerking and supports easy maintenance



Slotted Boom

Helps lift load to greater heights with travelling hooks



Rocker Switches

Reliable and low effort Rocker Switches with better aesthetic appearance

Peak Comfort



Center Mounted Gear Lever

For better operator comfort and reduce fatigue

Large Floor Space

Plenty of space with greater comfort for the operator



Digital Instrument Panel


Bright and ease to read CAN* based cluster with all gauges and engine fault code detection



Comfortable Operator Seat

Wider & Comfortable seat with safety belt

* Controller Area Network



Regeneration pop-up Message in Cluster

Provides timely regeneration alerts, reduces chances of engine breakdown

Specifications

ENGINE

Brand Escorts Kubota Model E4.391NA Cylinders /Displacement 4 cylinder/ 3.9 l Air Intake Naturally Aspirated

Fuel Injection Electronic, Common Rail Direct Injection

Emission Level CEV Stage V Max. Gross Power (kW) @2 000 rpm 37 kW/ 50 HP Max. Gross Torque (Nm) @1 200 rpm 217 Nm After Treatment DOC + DPF

*500 hrs. service interval available in Escorts Kubota Engine

HYDRAULIC SYSTEM

Hydraulic Pump	Vane type Hydraulic Pump
Control Valve	4 spool control valve with built in pressure relief valve
Hydraulic Filter	Suction Line has 100 mesh inline strainer while return line has 25 microns
	full flow filter

ELECTRICAL SYSTEM		
Battery	12 V, Negative Earth, 88 Ah	

SERVICE CAPACITIES		
Hydraulic Tank	83 I	
Fuel Tank	38 I	

DRIVETRAIN

Drive	2-Wheel Drive
Type	Heavy duty transmission especially developed for crane application, constant
	mesh gearbox coupled with straight drive axle, 8F & 2R speeds with high/low
Creep Speed Max Speed	selector lever
	1.7 km/h, ideal for crane application
	29 km/h (unladen)

STEERING

Clutch

Туре	Articulated power steering hydraulically controlled through 2 hydraulic jacks
Articulation	Up to 48° either side
Turning Radius	7 m

Heavy duty cerametallic clutch, asbestos free for longer life

BRAKES

Front Wheel	'S' cam pneumatically actuated drum brakes
Rear Wheel	Pneumatically actuated disc brakes
Parking	Hand control valve operated, air assisted parking brake at front wheels

воом

Telescoping	4-part, 3 part hydraulically powered & fully synchronized, 4th part power
	extended & manually pinned
Derricking	Through double acting Jacks -5° to + 55° angle
Type	Top Jack with Slotted Boom

HOIST MECHANISM

Hoist	6 Falls, Hydraulic winch 12 t capacity with inbuilt safety brakes
Wire Rope	13 mm Dia

TYRES

Front	11.00 x 20 - 16 PR (4 no's.) Pressure 110-115 PSI
Rear	13.00 x 24 - 12 PR (2 no's.) Pressure 35 PSI, Water ballasted

TRACK

Front	1.98 m
Rear	1.68 m

OVERALL DIMENSIONS

Length	11.90 m
Width	2.55 m
Height	3.10 m

Toll Free No.: 1800-180-4488

(Timings: 9:00 am - 5:30 pm, Monday to Saturday)

Escorts Kubota Limited Construction Equipment

Plot no. 219, Sector-58, Ballabhgarh-121004, Faridabad, Haryana (INDIA) Website: www.escortskubota.com Email: ekl_g.ece.marketing@escortskubota.com WhatsApp- +91 7303844233

OPERATING WEIGHT(KG)

Gross Vehicle Weight 12 050 Kg

SAFETY SYSTEM

- Overload Audio Warning System
- · Safety Brakes on Hoist
- · Cylinder Guards for Protection
- . Counter Balance Protection Valve in the Lift Circuit against Hose Burst
- · Visual warning for Parking Brakes ON
- Low Air Pressure Warning Buzzer
- Front or Rear Handles for Helper in Cabin
- . Neutral Start Safety Switch
- · Regeneration text pop-up message in instrument cluster

STANDARD ACCESSORIES

- Lift Cylinder Guard
- Front Bumper
- Turn & Reverse Lamp
- . Driver Seat with Seat Belt
- . Mobile Charging Socket
- . Battery Cut-off Switch
- . High Reliability Rocker Switch
- Ignition Switch ON/OFF
- IP67 Sealed Connectors in Wiring Harness
- Digital Instrument Cluster (CAN based)
- · Rear Tyres Mud Guard
- Extra Rear Foot Step

OPTIONAL ACCESSORIES

- Fly Jib
- · Fire Extinguisher
- Safe Load Indicator
- Storage Box
- · Man Carrying Basket
- Tyres -

Rear - 14 X 24-16 PR HD Front - 10 X 20-16 PR

Service & Spare Parts Support

- · Warranty and post warranty service.
- . On-site service through a wide network of dealerships.
- · Field diagnostic vehicle for immediate on-site resolution.
- · Complete range of genuine spare parts & lubricants.



80+ **Dealers**



200+ Service & **Touchpoints**











Download Brochure







Download Customer App for more details

Authorised Dealer