

COMBINATION OF
**TECHNOLOGY,
POWER &
MILEAGE**

42



**KUBOTA
MU4201 (42 HP CATEGORY)**

COMFORT · PERFORMANCE · DURABILITY



BALANCER
SHAFT



SYNCHROMESH
TRANSMISSION




KUBOTA QUAD-4
PISTON



DUAL ACTING
POWER STEERING

OPERATOR-FRIENDLY DRIVING SYSTEM

OPERATION DEVICES ARE LOCATED FOR MORE EFFICIENT AND COMFORTABLE WORK

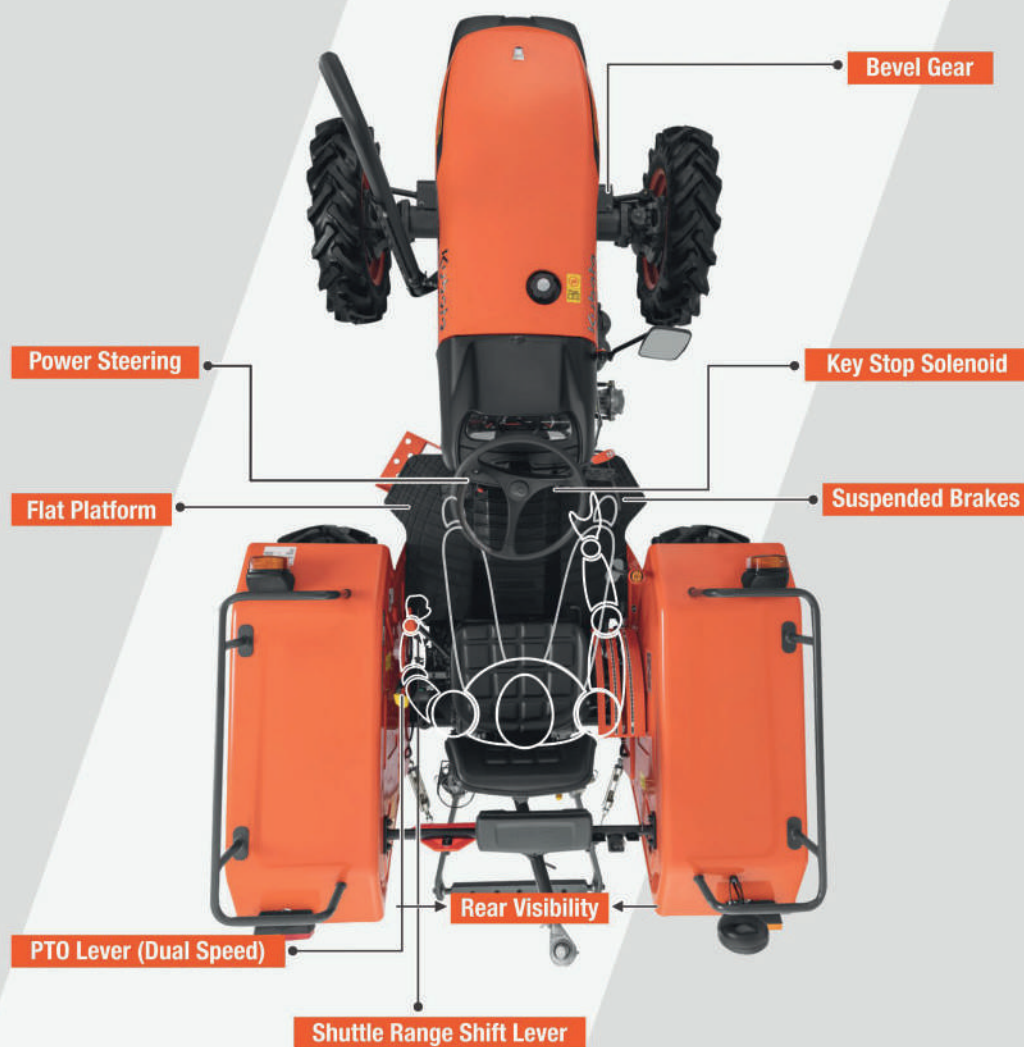

DUAL ACTING POWER STEERING

Excellent turning performance



WIDEST FENDER

Design for easy & stable baggage loading

KEY STOP SOLENOID

Operator can stop the engine only by turning key



LED DISPLAY

Indicators can be easily recognised by operators during night



BEVEL GEAR


Less maintenance, improve life & Hassle free driving in turns



EQUIPPED WITH OPERATOR FRIENDLINESS & COMFORT FOR AGRICULTURE OPERATIONS

COMBINATION OF TECHNOLOGY, POWER & MILEAGE

ENGINE




BALANCER SHAFT

Less vibration &
low noise

SYNCHROMESH TRANSMISSION

SMOOTH TRANSMISSION

Smooth transmission of
the gear while shifting



SHUTTLE SHIFT

Changing of forward &
backward direction is
made easy

COMFORT

FLAT PLATFORM

Easy get in & get down
without any interference



SUSPENDED BRAKES

Improves operator
comfort

SINGLE PIECE BONNET

Easy to open & use better
accessibility to engine
compartment



INDEPENDENT DUAL PTO

A lever allows the operator to
simply change PTO speed
(standard 540 and
economy 750)



4 FIN CLUTCH

33% better Durability
Compare to regular
Clutch



WORLD'S TOP CLASS HIGH QUALITY OIL SEALS

The oil seals are made by world-class
Japanese seal manufacturing company

HIGH HYDRAULIC LIFT CAPACITY

High lift Capacity enough for
the implements used on
these tractor



SPECIFICATIONS

MODEL	SPECIFICATIONS	MU4201
Engine	Type	Kubota V2403-M-DI-E3, Inline FIP, 4 Cylinders, Liquid cooled
	Displacement	2 434 cc
	Air Filter	Dry Type, Dual Element
	Clutch	Double Clutch
Transmission	Gear Box	8 Forward + 4 Reverse Main Transmission Synchronesh
	Speeds	Forward Min 3.0 km/h - Max 30.8 km/h
		Reverse Min 3.9 km/h - Max 13.8 km/h
Brakes	Type	Oil Immersed Disc Brakes
Front Axle	Type	Fix
Hydraulics	Lifting Capacity	1 640 kgf (at lift point)
Steering	Type	Hydraulic Double Acting Power Steering
Power Take Off	Type	Independent Dual PTO
PTO RPM		STD: 540 RPM @2 484 ERPM
		ECO: 750 RPM @2 481 ERPM
Wheel & Tyres	Front	15.24 cm x 40.64 cm (6 x 16) (2WD) / 20.32 cm x 45.72 cm (8 x 18) (4WD)
	Rear	34.54 cm x 71.12 cm (13.6 x 28) Low Lug & High Lug
Electrical System	Battery	12 V
	Alternator	40 A
	Starter Motor	12 V, 2.2 kW
Dimensions & Weight	Total Weight	1 850 kg (2WD) / 1 970 kg (4WD)
	Wheel Base	1 990 mm
	Overall Length (without 3P)	3 100 mm (2WD) / 3 110 mm (4WD)
	Overall Width	1 865 mm (2WD) / 1 870 mm (4WD)
	Ground Clearance	405 mm (2WD) / 365 mm (4WD)
	Turning Radius with Brakes	2.80 m (2WD) / 2.90 m (4WD)
Front Axle Drive	Front Wheel Drive	2WD / 4WD (Bevel Gear)
Others	Deck Design	Full Flat
	Fuel Tank Capacity	60 litre

Calculated under standard testing conditions. Actual results may differ.

Applications are not a part of tractor and should be purchased separately.

ROTAVATOR



HAULAGE




QUALITY YOU CAN TRUST ON

Kubota received the deming prize which is the highest proof of recognition of major advances in quality improvement. Kubota has also received the ISO9001 Certification which is the international standard of quality management systems, the ISO14001 Certification which is the international standards related to environment management, and the OSHAS 18001 Certification which is the international assessment series of occupational health and safety systems.



OSHAS 18001
Certification

ISO9001
Certification



The Deming
Prize



ISO14001
Certification

Kubota

Escorts Kubota Limited

15/5, Mathura Road, Faridabad - 121003



Toll Free : 1800 103 2010