

## SPECIFICATIONS

Model	Specification	MU5502 (2WD)
<b>Engine</b>	Type	Kubota V2403-M-DI-TE3, Inline FIP E-CDIS, 4 Cylinder, Liquid Cooled
	Displacement	2434 cc
	Backup Torque	35%
	Air Filter	Dry type, dual element
	Clutch	Double Clutch
<b>Transmission</b>	Gear Box	12 Forward + 4 Reverse Main Transmission Synchronesh
	Speeds	Forward 1.8- 30.8 kmph Reverse 5.1 - 14 kmph
<b>Brakes</b>	Type	Oil Immersed Multi Disc Brakes
<b>Front Axle</b>	Type	Fix / Variable 2WD
<b>Hydraulics</b>	Lifting Capacity	1,800 kgf and 2,100 kgf at lift point
	Pump Capacity	29.2 lpm / 36.5 lpm (T)
<b>Steering</b>	Type	Power (Hydraulic Double acting)
<b>Power Take Off</b>	Type	Independent, Dual PTO
	PTO RPM	STD : 540 @2160 ERPM ECO : 750 @2200 ERPM
<b>Wheels &amp; Tyres</b>	Front	7.5 x16/6.5 x 20
	Rear	16.9 x 28
<b>Electrical System</b>	Batter	12 Volt
	Alternator	55 Amp
	Starter Motor	12 Volt, 2.0 kW
<b>Dimensions &amp; Weight</b>	Total weight	2310 kg
	Wheel base	2100 mm
	Overall length	3720 mm
	Overall width	1965 mm
	Ground clearance	420 mm
<b>Other</b>	Turning radius with brakes	2.9 m
	Deck design	Flat Deck
<b>Factory Fitted Options</b>	Fuel Tank Capacity	65 Liters
	Auxiliary Control Valve	
	Reverse PTO (RPTO)	
	2WD Adjustable axle	
		T - TOT variant for Harvesters

Calculated according to our criteria. The actual capacity you achieve may be different. The specifications, information, and appearance of the machines herein are subject to change without notice.



Plough



TOT



Super Seeder



Trolley

### Kubota Agricultural Machinery India Pvt Ltd.

No.94, TVH BELICIAA, TOWER- 1,  
8<sup>th</sup> floor, MRC Nagar, Chennai - 600 028  
Tel : +91 - 44 - 6104 1500 Fax : 044 6104 1600  
Web : www.kubota.co.in, Follow Us : [You](#) [Tube](#) [f](#) [i](#) [g](#)

Toll Free : 1800 - 425 - 1694

# Kubota

JAPAN'S NO.1 TRACTOR COMPANY

# MU

## MU5502

REMARKABLE ENGINE  
REMARKABLE PERFORMANCE




\*T&C Apply



e-CDIS  
Engine



4 Valves  
System



Balancer  
Shaft



Synchro  
Gear  
12+4 Speed






# Kubota V2403-M-DI-TE3 Engine Performance with Fuel Efficiency

## Excellent Engine Set-up

Same LEGENDARY V2403 Engine is in MU5502

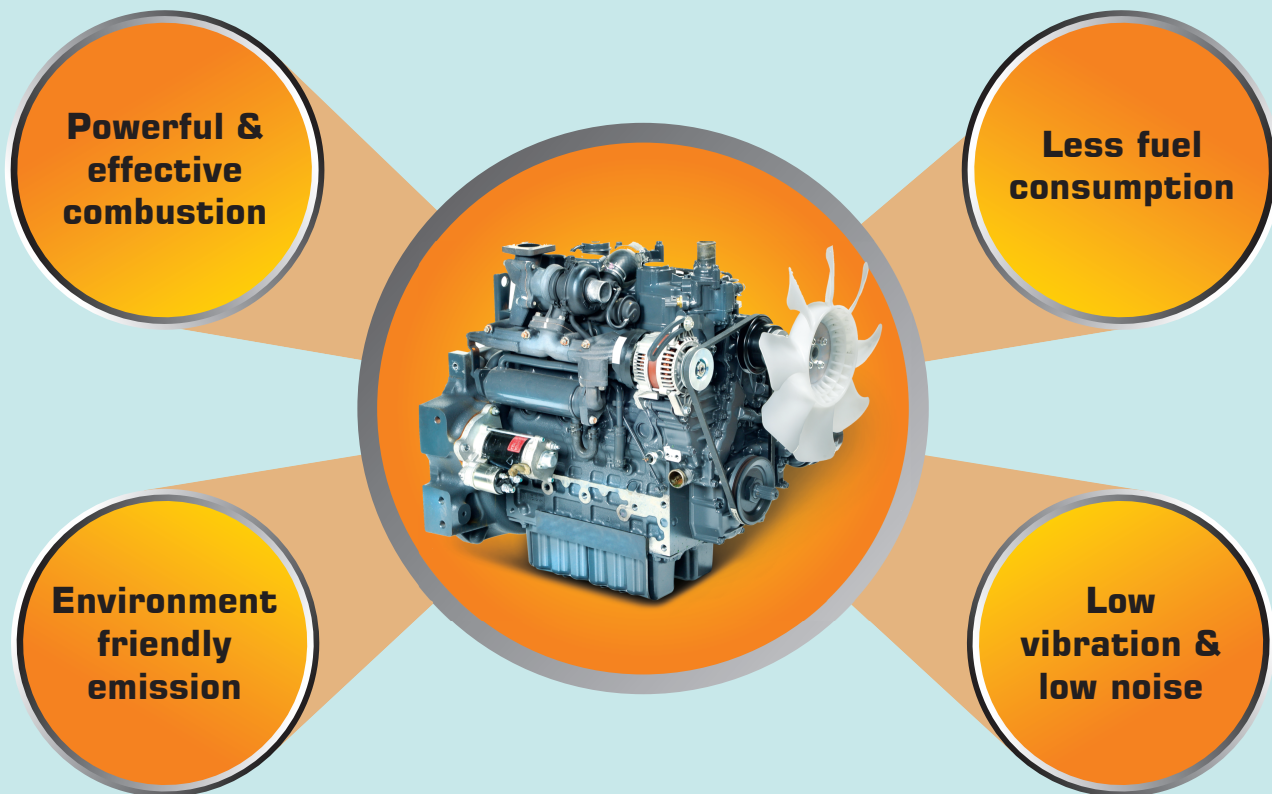


### e-CDIS Technology

Eco-Central Direct Injection system for less fuel consumption



### 4 Valves System

Better combustion and more power



### Balancer Shaft

Less vibration & low noise



### Synchro Gear 12+4 Speed

12F [1.8 to 30.8 kmph]  
4R [5.1 to 14 kmph]

# MU5502

The MU5502 is a high performance tractor with better fuel efficiency & reliability leading to high productivity.

## Performance



Main Transmission Synchronesh



Independent PTO with STD ECO / RPTO\*



High hydraulic lift capacity 1,800 kgf and 2,100 kgf (at lift point)



Double acting power steering with variable front axle

## Comfort



Suspended pedals improves operator's comfort



Larger seat with better suspension, adjustable & comfortable for long operating hours



LED back light meter panel for easy operations even at night with all safety signs




Flat deck with rubber mat for comfortable operation



Front opening hood easy to open with the touch of a knob



Best in class brake lock



Accessible PTO speed change lever



Luxurious accelerator pedal




Telescopic stabilizer for easy setting

## Reliability



5 Fin cerametallic double clutch 25% more durability



Clutch fixing lock for better clutch reliability



Planetary drive for better traction



Reliable oil immersed brakes



World top class high quality Japanese NOK oil seals