

# NeoStar B2741S

## Specifications

| Model          |                                             | NeoStar B2741                                         |
|----------------|---------------------------------------------|-------------------------------------------------------|
| Engine         | Type                                        | Kubota DI305-E4, E-TVCS, liquid-cooled, diesel engine |
|                | No of cylinders                             | 3                                                     |
|                | Total displacement (CC)                     | 1261                                                  |
|                | Maximum torque                              | 81.1 N·m                                              |
| Transmission   | Clutch                                      | Dry Single Plate                                      |
|                | Steering                                    | Power Steering                                        |
|                | Transmission                                | Gear shift, 9 forward and 3 reverse                   |
|                | Braking system                              | Oil immersed brakes (OIB)                             |
|                | Speed Range (Km/hr)                         | 2.0- 19.8                                             |
| Hydraulic Unit | Min. turning radius (with brake) (m)        | 2.1                                                   |
|                | Hydraulic control system                    | Position Control & Super Draft Control                |
|                | Three point hitch                           | Category I                                            |
|                | Max. lift force At lift point (Kg)          | 750                                                   |
| PTO            | PTO / Engine speed(rpm)                     | 540 , 750 (540@1830)                                  |
| Capacities     | Fuel tank                                   | 23 L                                                  |
| Dimensions     | Overall length (without 3P) (mm)            | 2410                                                  |
|                | Overall width (mm)                          | 1015, 1105                                            |
|                | Overall height (Top of steering wheel) (mm) | 1280                                                  |
|                | Wheel base (mm)                             | 1560                                                  |
|                | Min. ground clearance (mm)                  | 325                                                   |
|                | Weight (Kg)                                 | 650                                                   |
| Tires          | Front (mm)                                  | 7-12 (180/85D12)                                      |
|                | Rear (mm)                                   | 8.3 - 20 / 9.5-18 (optional)                          |

Calculated according to our criteria. The actual capacity you achieve may be different.  
The specifications, information, and appearance of the machines herein are subject to change without notice.

## Quality you can trust on

Kubota received the Deming Prize which is the highest proof of recognition of major advances in quality improvement. Kubota has also received the ISO9001 Certification which is the international standard of quality management systems, the ISO14001 Certification which is the international standards related to environment management, and the OSHAS 18001 Certification which is the international assessment series of occupational health and safety systems.



The Deming Prize



OSHAS 18001 Certification



ISO9001 Certification



ISO14001 Certification



Escorts Kubota Limited

15/5, Mathura Road, Faridabad-121003

Toll Free : 1800 309 1694

KUBOTA/ FEBRUARY 2023/ ENGLISH



Escorts Kubota Limited

# B

## NeoStar - B2741S (27HP category)

With a **E-TVCS engine**, power steering and a compact design, the B2741 provides the maneuverability and power needed for interculture & orchard application.

## Japanese Technology for Indian Farming



Super Draft control (SDC)



ECO-PTO




2.1m Turning Radius

\*Disclaimer: A per Japan's Journal GYOKAI, Kubota ranks No.1 (Agri Machinery) for the year 2021 in turnover

\*Terms & Conditions Apply

# NeoStar B2741S

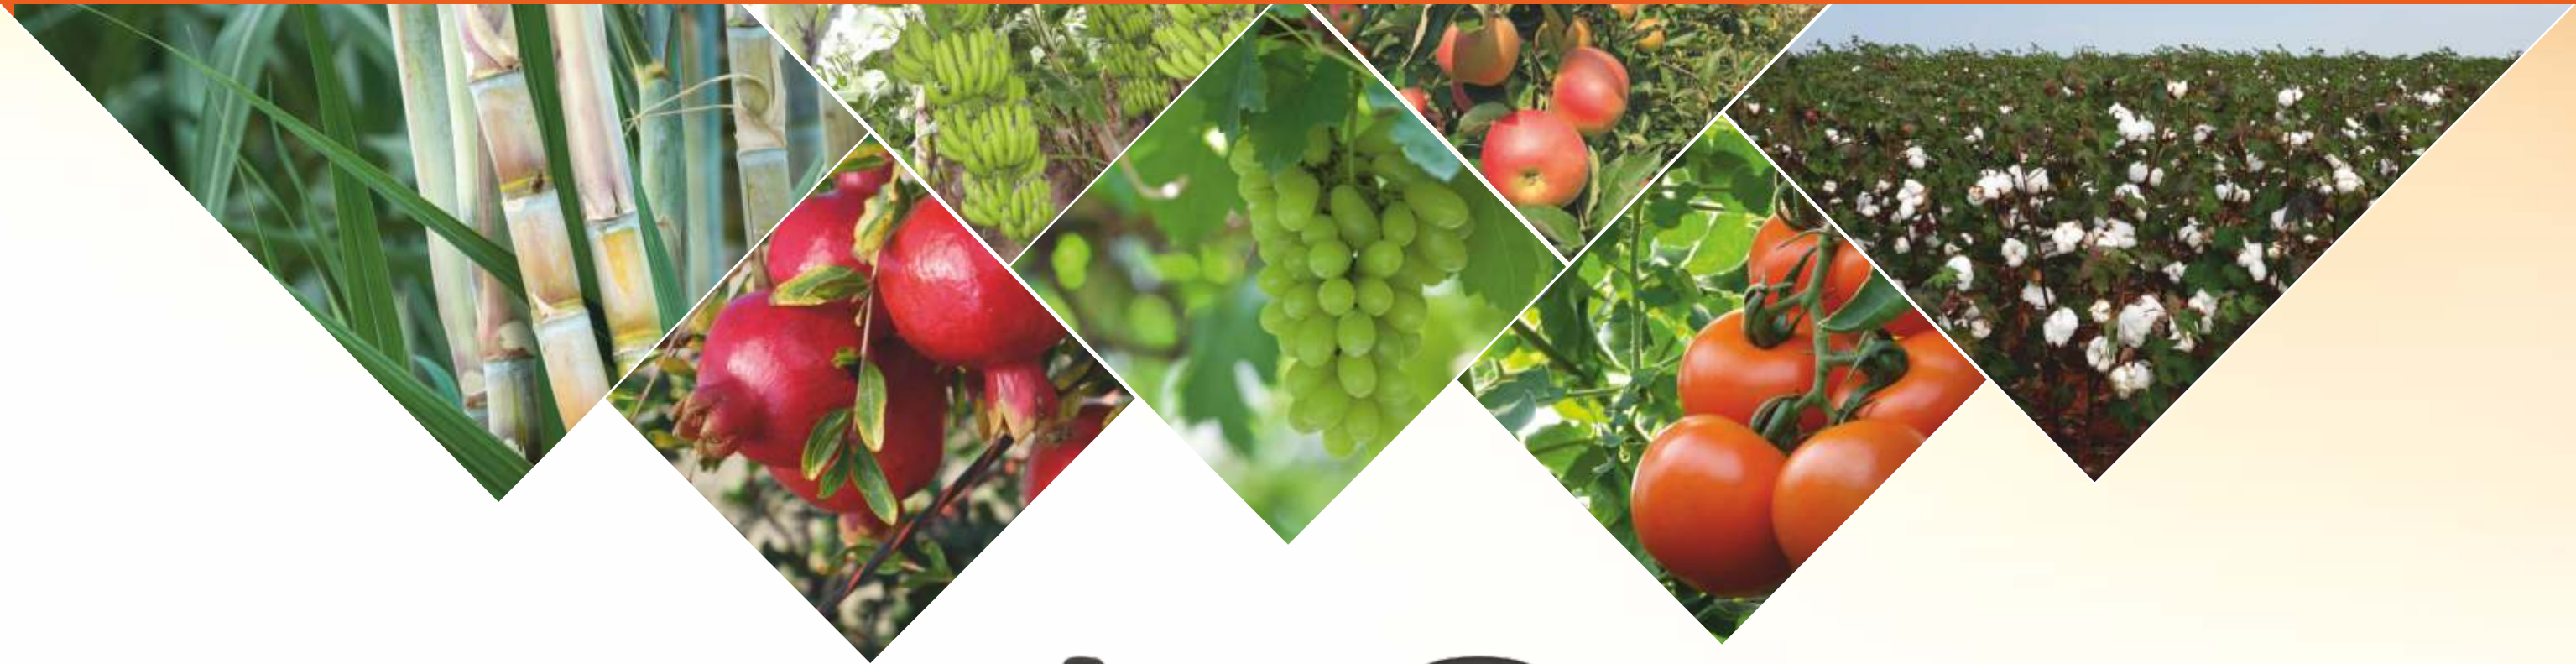

## Engine technology-ETVCS

Excellent power, high torque,  
cleaner emissions



## Super Draft control (SDC)

Easy operations with implements  
on various fields



## ECO-PTO

Economical in operations,  
low fuel consumption



## Seat suspension

Comfortable and adjustable seat for longer  
operating hours



## OIB

Reduction in wear and tear,  
enhanced brakes life



## Frontside Opening bonnet

One piece bonnet,  
easy daily maintenance