



**Dominate the field with Shaurya**



- ▶ Superior Ground Clearance
- ▶ Maximise Productivity
- ▶ Unmatched Power & Performance



Scan this to know more

	POWERTRAC EURO 439 SHAURYA	POWERTRAC EURO 42 SHAURYA	POWERTRAC EURO 45 SHAURYA	POWERTRAC EURO 47 SHAURYA	POWERTRAC EURO 50 SHAURYA
	3 Cylinder 2.34 litres, 29.1 kW Cat. (39 HP Cat.) PTO Power : 25.7 kW (34.5 HP)	3 Cylinder 2.49 litres, 31.3 kW (42 HP) PTO Power : 28.4 kW (38.1 HP)	3 Cylinder 2.76 litres, 33.6 kW (45 HP) PTO Power : 30.4 kW (40.8 HP)	3 Cylinder 2.76 litres, 33.6 kW (45 HP) PTO Power : 30.6 kW (41.1 HP)	3 Cylinder 2.93 litres, 38.8 kW Cat. (52 HP Cat.) PTO Power : 34.0 kW (45.5 HP)
	162 Nm Engine Torque	176 Nm Engine Torque	192 Nm Engine Torque	198.5 Nm Engine Torque	206 Nm Engine Torque
	Single Clutch / Dual Clutch	Single Clutch / Dual Clutch / Double Clutch	Single Clutch / Dual Clutch / Double Clutch	Single Clutch / Dual Clutch / Double Clutch	Dual Clutch / Double Clutch
	8+2, Constant Mesh, Center Shift Gear	8+2, Constant Mesh, Center Shift Gear	8+2, Constant Mesh, Center Shift Gear	8+2, Constant Mesh, Center Shift Gear	8+2, Constant Mesh, Center Shift Gear
	1 600 kg Hydraulic Lift Capacity	1 600 kg Hydraulic Lift Capacity	1 600 kg Hydraulic Lift Capacity	2 000 kg Hydraulic Lift Capacity	2 000 kg Hydraulic Lift Capacity
	34.54 cm x 71.12 cm (13.6 inch x 28 inch)	34.54 cm x 71.12 cm (13.6 inch x 28 inch)	34.54 cm x 71.12 cm (13.6 inch x 28 inch)	37.85 cm x 71.12 cm (14.9 inch x 28 inch)	37.85 cm x 71.12 cm (14.9 inch x 28 inch)

PARAMETER						
Fuel Tank Capacity	50 Litres	●	●	●	●	
Front Axle	Bend Axle, Balanced Power Steering	● / Mechanical	●	●	●	
Tyre Size: Front	16.51 cm x 40.64 cm (6.5 inch X 16 inch)	15.24 cm x 40.64 cm (6 inch x 16 inch)	15.24 cm x 40.64 cm (6 inch x 16 inch)	●	●	
Dimension	Wheelbase (mm)	1900	1900	1910	1915	
	Total Weight (kg)	1951	1960	1980	2020	2040
	Turning Radius (3.1 m)	●	●	●	●	●
	Overall Length (3600 mm)	●	●	●	●	●
	Overall Width (mm)	1740	1740	1745	1830	1830
	Overall Height (mm)	2200	2200	2210	2210	2210
	Ground Clearance (mm)	405	405	410	412	420
Top Speed (km/h)	35.8	35.8	35.8	35.6	35.6	

**Kubota**  
Escorts Kubota Limited  
Above specifications are subject to change. \*Conditions Apply.


Escorts Kubota Limited  
15/5, Mathura Road, Faridabad  
Toll-Free Number: **1800 103 2010**

— **WITNESS THE ULTIMATE** —  
**SHAURYA**

**29.1 kW Cat. – 38.8 kW Cat.**  
**39 HP Cat. – 52 HP Cat.**



**POWERTRAC**  
INDIA'S #1\* EFFICIENT TRACTOR

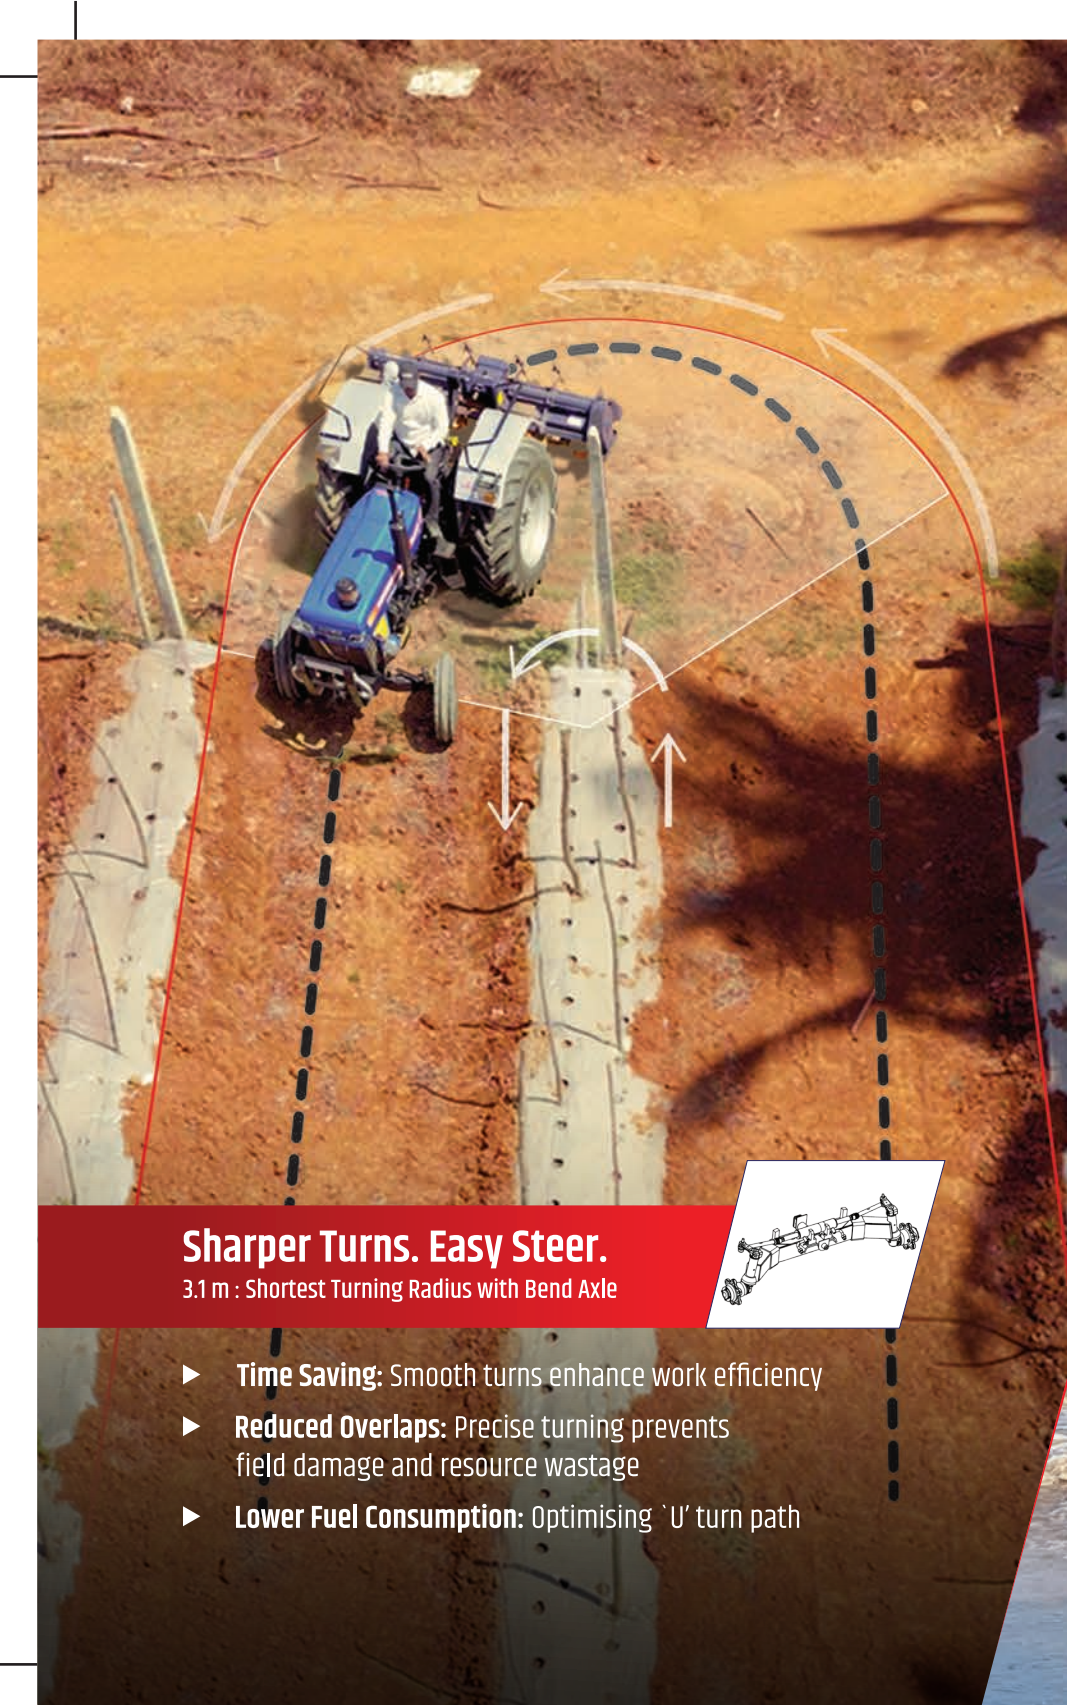

**Built-in Protection, Wetland Applications**  
Cassette Type Seal, High-grade

- ▶ **Superior Protection:** Prevents the entry of thick muddy water with cassette type seal on PTO, rear axle shaft and high-grade seal on front axle
- ▶ **Paddy Specialist:** Water Ingress free design
- ▶ **Longer Life:** Reduced downtime and less maintenance



**Sharper Turns. Easy Steer.**  
3.1 m : Shortest Turning Radius with Bend Axle

- ▶ **Time Saving:** Smooth turns enhance work efficiency
- ▶ **Reduced Overlaps:** Precise turning prevents field damage and resource wastage
- ▶ **Lower Fuel Consumption:** Optimising 'U' turn path

**Power-packed features that define Shaurya**

**POWERFUL ENGINE**  
(2.34-2.93 litre, 2000 rated RPM series)  
Extra power with best-in-class fuel efficiency-Handles sudden loads, boosts performance

**BEST MANEUVERABILITY**  
Turning Radius [3.1 metre]  
Assists sharper turning for excellent maneuverability, reduces effort on sharp and small turns

**FULLY CONSTANT MESH GEARBOX**  
8 Forward + 2 Reverse Gear Speeds  
Smooth shifting for longer working hours, less fatigue

**CASSETTE SEAL**  
Water & Mud Ingress-Free  
Prevents water and mud ingress, reduces tractor downtime, and minimises maintenance cost

**SENSI 1 HYDRAULIC LIFT**  
(1 600 - 2 000 kg) Automatic Depth & Draft Control  
Delivers precise sensing, ensuring uniform depth for high productivity

**TRACTION BOOSTER**  
Differential Lock  
Improves traction and control in extreme conditions, preventing wheel slippage

**DUAL/MULTI-SPEED PTO**  
540/1000 & Reverse PTO  
Supports diverse applications, improves fuel efficiency and increases savings

**ROBUST REAR AXLE & BULL PINION**  
SG Iron Rear Axle Housing  
Higher load capacity enhances durability, uptime and makes it maintenance-proof

**WIRING HARNESS INSIDE FENDER CHANNEL**  
For Enhanced Safety  
Routed inside the fender channel to protect from mud, water, and debris

**SPOOL VALVE 1DA/SA**  
Better Operation & Control  
Assists in faster operation, suitable for Agri/Haulage operation and control

**OTHER FEATURES**

- Front Bumper (80 kg), Integrated Front Tow Hook
- 300 Hours Service Interval
- Single Piece Bonnet
- Adjustable Driver Seat with Water Bottle Holder
- 16.5 cm (6.5 inch) OIB Brake, 4 Disc on Each Side
- Balanced Power Steering with Knob



**Power Up Your Comfort**  
IPTO (Independent PTO/Double Clutch)

- ▶ **Improved Productivity:** Uninterrupted PTO power, enhanced work speed
- ▶ **Less Maintenance:** Lesser wear rate, lower maintenance cost
- ▶ **Greater Versatility:** Suitable for advanced and emerging PTO related applications like Baler, Roto Puddler, etc.

**Stylised Comfort. Paramount Safety.**  
Optimised Weight Balance and Enhanced Ergonomics

- ▶ **Safety-first Design:** Optimised weight distribution with front bumper for better functionality
- ▶ **Paddy Special Platform:** Perforated elevated platform prevents mud and water accumulation on platform
- ▶ **Superior Design:**
  - Adjustable slider seat
  - Balanced power steering with knob
  - Anti-slip pads for foot operated controls

