


■ SPECIFICATION

Model		NeoStar A211N - NS	NeoStar A211N - OP
Engine	Type	Kubota DI005-E4, E-TVCS, liquid-cooled, diesel engine	Kubota DI005-E4, E-TVCS, liquid-cooled, diesel engine
	No of cylinders	3	3
	Total displacement (CC)	1001	1001
	Engine Gross power (HP)	21 HP	21 HP
	Engine net Power (HP)	18.6@2600 rpm	18.6@2600 rpm
	PTO power (HP)	11.5 kW (15.4 HP)	11.5 kW (15.4 HP)
	Maximum torque	58.3 N·m	58.3 N·m
Transmission	Clutch	Dry Single Plate	Dry Single Plate
	Steering	Manual Steering	Manual Steering
	Transmission	Gear shift, 9 forward and 3 reverse	Gear shift, 9 forward and 3 reverse
	Braking system	Oil immersed brakes (OIB)	Oil immersed brakes (OIB)
	Speed Range (Km/hr)	1.0-18.6	1.0-19.8
	Min. turning radius (with brake) (m)	2.1	2.1
Hydraulic Unit	Hydraulic control system	Position Control	Position Control & Super Draft Control
	Three point hitch	Category I	Category I
	Max. lift force At lift point (Kg)	750	750
PTO	PTO / Engine speed(rpm)	540 , 980	540 , 980
Capacities	Fuel tank	23 L	23 L
Dimensions	Overall length (without 3P) (mm)	2390	2410
	Overall width (mm)	910, 1000	1015, 1105
	Overall height (Top of steering wheel) (mm)	1260	1280
	Wheel base (mm)	1560	1560
	Min. ground clearance (mm)	285	325
	Weight (Kg)	600	630
Tires	Front (mm)	5-12	7-12 (180/85D12)
	Rear (mm)	8 - 18	8.3-20

■ CROP RANGE

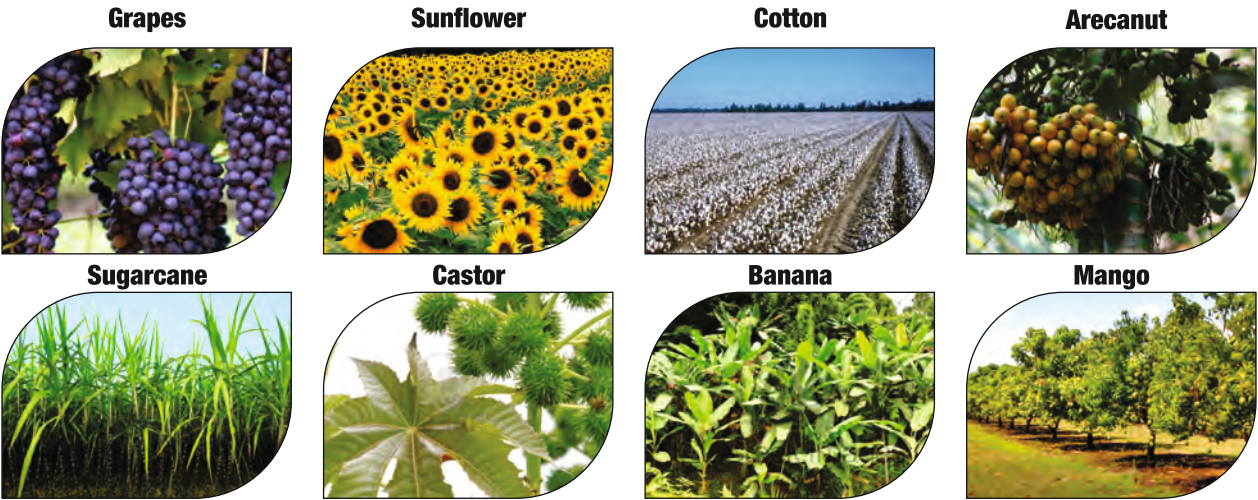

Calculated according to our criteria. The actual capacity you achieve may be different.
The specifications, information, and appearance of the machines herein are subject to change without notice.

Kubota Agricultural Machinery India Pvt Ltd.
#15, Medavakkam Road, Sholinganallur,
Chennai-600119. Tamilnadu, India
Tel : +91 - 44 - 6104 1500 Fax : 044 6104 1600
Web : www.kubota.co.in

Toll Free : 1800 - 425 - 1694

KUBOTA / MARCH-19 / ENGLISH

Kubota

JAPAN'S NO.1 TRACTOR COMPANY

A

NeoStar - 21HP

This little master **A211N** , is a real workhorse with E-TVCS Engine.
Suitable for interculture in narrow row crops.



2.98
Ft.

Unmatched Width

2.1
m

Turning Radius

21

Horse Power

*Terms and conditions apply