

Kubota

MU

MU4201 PERFECT BALANCE OF TECHNOLOGY, POWER & MILEAGE



4 CYLINDER ENGINE



2WD | 4WD



SYNCHROMESH
TRANSMISSION



BALANCER
SHAFT




INDEPENDENT
PTO

*Terms & conditions apply

OPERATOR-FRIENDLY DRIVING SYSTEM

OPERATING DEVICES ARE LOCATED FOR MORE EFFICIENT AND COMFORTABLE WORK

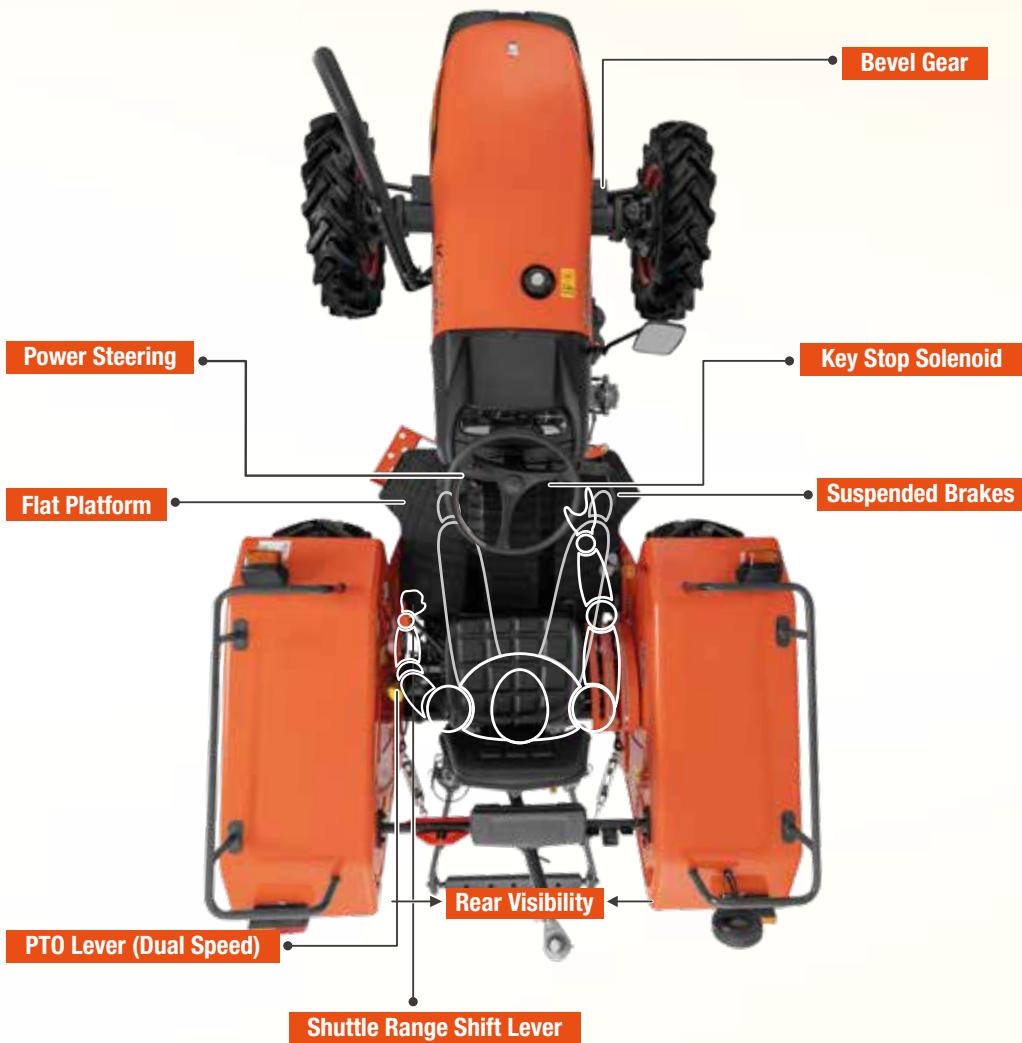

DUAL ACTING POWER STEERING

*Excellent turning
performance*




WIDEST FENDER

*Designed for easy & stable
baggage loading*

KEY STOP SOLENOID

Operator can stop the engine only by turning key

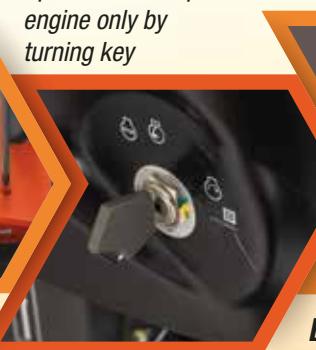

LED DISPLAY

Indicators can be easily recognised by operators during night



BEVEL GEAR

*Low maintenance,
improved life & Hassle
free driving in turns*

EQUIPPED WITH OPERATOR FRIENDLY & COMFORT FOR AGRICULTURAL OPERATIONS

**PERFECT BALANCE OF
TECHNOLOGY, POWER & MILEAGE**

ENGINE




BALANCER SHAFT

Less vibration & low noise

SYNCHROMESH TRANSMISSION

SMOOTH TRANSMISSION

Smooth transmission of the gear while shifting

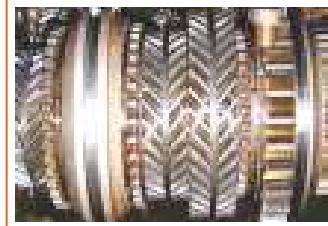

SHUTTLE SHIFT

Changing of forward & backward direction is made easy

COMFORT

FLAT PLATFORM

Easy get in & get down without any interference



SUSPENDED BRAKES

Improves Operator Comfort

SINGLE PIECE BONNET

Easy to open & use better accessibility to engine compartment



INDEPENDENT DUAL PTO

A lever allows the operator to simply change PTO speed (standard 540 and economy 750)



HIGH HYDRAULIC LIFT CAPACITY

High lift Capacity enough for the implements used on these tractor



WORLD'S TOP CLASS HIGH QUALITY OIL SEALS

The oil seals are made by reliable Japanese seal manufacturing company

4 FIN CLUTCH

33% better Durability
Compare to regular Clutch

SPECIFICATIONS

MODEL	SPECIFICATIONS	MU4201 - 30.9 kW Cat. (42 HP Cat.)
Engine	Type	Kubota V2403-M-DI-INT03, Inline FIP, 4 Cylinders, Liquid cooled
	Displacement	2 434 cc
	Air Filter	Dry Type, Dual Element
	Clutch	Double Clutch
Transmission	Gear Box	8F + 4R Main Transmission Synchromesh
	Speeds	Forward 3.0 km/h - 30.8 km/h Reverse 3.9 km/h - 13.8 km/h
Brakes	Type	Oil Immersed Disc Brakes
Front Axle	Type	Fix
Hydraulics	Lifting Capacity	1 640 kgf (at lift point)
Steering	Type	Hydraulic Double Acting Power Steering
Power Take Off	Type	Independent Dual PTO
PTO RPM		STD: 540 @2 484 ERPM
		ECO: 750 @2 481 ERPM
Wheel & Tyres	Front	15.24 cm x 40.64 cm (6 x 16) (2WD) / 20.32 cm x 45.72 cm (8 x 18) (4WD)
	Rear	34.54 cm x 71.12 cm (13.6 x 28) Low Lug & High Lug
Electrical System	Battery	12 V
	Alternator	40 A
	Starter Motor	12 V, 2.2 kW
	Total Weight	1 850 kg (2WD) / 1 970 kg (4WD)
	Wheel Base	1 990 mm
Dimensions & Weight	Overall Length (without 3P)	3 100 mm (2WD) / 3 110 mm (4WD)
	Overall Width	1 865 mm (2WD) / 1 870 mm (4WD)
	Ground Clearance	405 mm (2WD) / 365 mm (4WD)
	Turning Radius with Brakes	2.80 m (2WD) / 2.90 m (4WD)
Front Axle Drive	Front Wheel Drive	2WD / 4WD (Bevel Gear)
Others	Deck Design	Full Flat
	Fuel Tank Capacity	60 litret

Calculated according to our criteria. The actual capacity you achieve may be different.

The specifications, information, and appearance of the machines herein are subject to change without notice.

Quality you can trust on

Kubota received the Deming Prize which is the highest proof of recognition of major advances in quality improvement. Kubota has also received the ISO9001 Certification which is the international standard of quality management systems, the ISO14001 Certification which is the international standards related to environment management, and the OSHAS 18001 Certification which is the international assessment series of occupational health and safety systems.



The Deming Prize



OSHAS 18001 Certification



ISO9001 Certification



ISO14001 Certification